


BTM-308 mini Stereo Bluetooth headset user manual

The **BTM-308** mini stereo Bluetooth headset is tiny and elegant. It supports the **A2DP** and **AVRCP** profiles for which you are set free of your hands for tele-conversation and enjoying the MP3 music freely anytime. Please read this user manual before using the headset.

Package:

- ◆ One **BTM-308** Bluetooth headset
- ◆ One battery charger & USB cable
- ◆ One stereo earpiece & one single earpiece
- ◆ One user manual

Headset parts and keys:

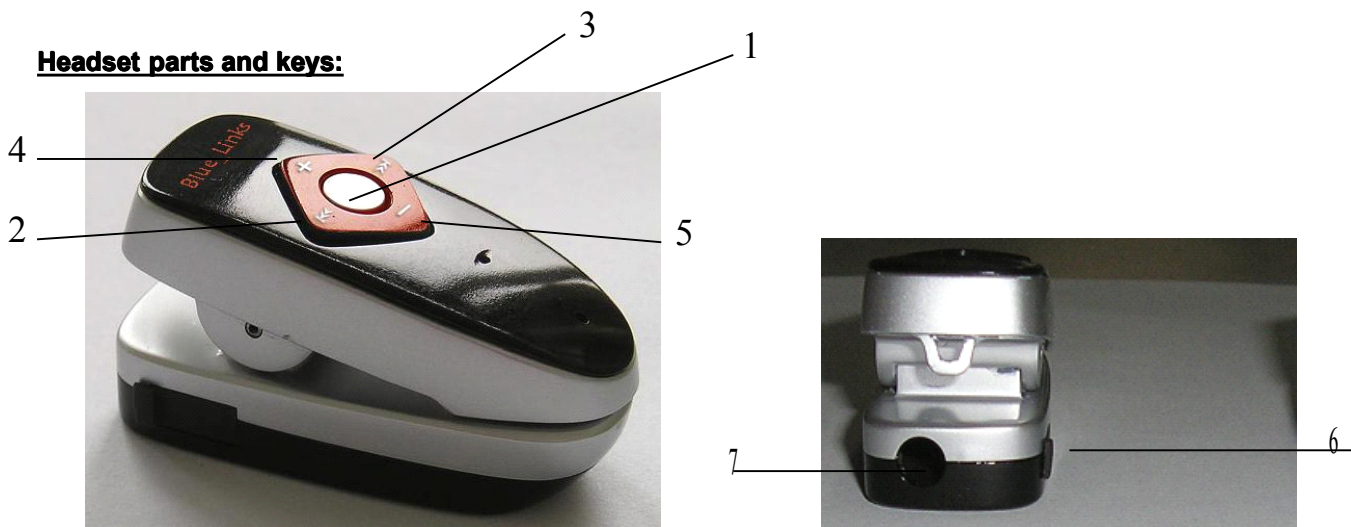

1. Multi-function key: ON/OFF; pairing; connect; conversation; call switching; MP3 play/pause; reject call.
2. |◀◀: Select previous song; redial.
3. ▶▶|: Select next song; redial.
4. + : Increase volume; voice dialing
5. - : Decrease volume; switch buzzer ON/OFF
6. USB socket
7. 3.5mm earphone socket

LED indication

Turn on	LED flashes blue twice; then flashes for every 15 seconds. Flashes red in battery low.
Turn off	LED flashes red twice, then headset is off
Charging (headset is off)	LED in red until battery full
Low battery	LED flashes for every 15 seconds
Pairing	LED flashes red/blue alternatively
Calling	LED flashes blue twice for every 15 seconds (LED flashes red if it is battery low)
Incoming call	LED flashes red/blue alternatively twice for every second
In conversation	LED flashes blue twice for every 15 seconds (LED flashes red if it is battery low)
Disconnect Bluetooth connection	LED flashes blue once for every 15 seconds (LED flashes red if it is battery low)
In connection (standby mode)	LED flashes blue twice for every 15 seconds (LED flashes red if it is battery low)
AV connection mode	LED flashes blue twice for every 15 seconds (LED flashes red if it is battery low)
Music playing	LED flashes blue twice for every 15 seconds (LED flashes red if it is battery low)
Music Pause	LED flashes blue twice for every 15 seconds (LED flashes red if it is battery low)

Headset operation

1. Firstly, charging the headset if you find the battery is exhausted.
2. After charging, switch on the headset and the mobile phone or other Bluetooth device for pairing.
3. The headset is ready to use after pairing.

Headset charging

1. Turn off the headset before charging.
2. Insert the USB cable to the charging socket of the BTM-308 headset.
3. Connect the USB cable to the battery charger and then plug the charger to the main power. The LED will turn red while charging and turn off when charging is completed.
4. Remove the charger from the main power first and disconnect it from the headset after the LED goes off.
5. The first time charging needs 14 hours to achieve the best performance of the battery. Afterward re-charging is to be completed around 3 hours.
6. If the headset battery is exhausted, it would take a few seconds for the LED to light up. A completely re-charged headset provides about 6 hours talking time or 180 hours standby time but varies according to the users' operation mode and mobile phone settings.

Caution:

It is a must to use only the original battery charger and USB cable to re-charge the headset. Any damage to the headset due to using other USB cable or charger will void the warranty of the product.

Switching on headset

To turn on the headset, press down the Multi-function key for 3 seconds. The LED flashes blue and turn on the headset.

Switching off headset

To turn off the headset, press down the Multi-function key for 6 seconds. The LED flashes red twice and shut down the headset.

Headset pairing

You will need to pair the headset with your mobile phone for the first time to connect them.

1. Place the mobile phone and headset within 1 meter apart (no blocking object in between).
2. The headset is turned off. (The headset can be paired only in turned off status). Press the Multi-function key and hold it until the headset flashes red and blue to enter the pairing status.
3. Turn on the Bluetooth service in your mobile phone according to the instruction of mobile phone user manual and search for new device.
4. Select **BTM-308** in your mobile phone and enter the password "0000". Connect your mobile phone with the **BTM-308** headset. Now, you can use the **BTM-308** headset for conversation and listening MP3 music of your mobile phone. Please note that if the pairing is unsuccessful in 300 seconds, you have to follow the above procedures to try pairing again.
5. After the first time pairing, you can connect the paired **BTM-308** every time you turn on your mobile phone in the working distance range. No need to pair them again.

Using the headset

- ◆ **Accept call** –The LED flashes red and blue when there is incoming call, press the Multi-function key once to accept the call.
- ◆ **Terminate call** - Press the Multi-function key once to end a call.
- ◆ **Redial** - While the headset is under standby mode or playing MP3, press the |◀◀ or ▶▶| and hold it for 2 seconds to redial the last call after the buzzer sounds. The redial function is applicable to mobile phone with Bluetooth hands free profile. This operation may vary depending on the mobile phone model. Please refer to the mobile phone user guide for more information.
- ◆ **Volume adjust** – Press the + to increase the volume, the - to decrease the volume.

- ◆ **Voice dialing** - If your mobile phone supports voice dialing, press the **+** and hold it for 2 seconds until you hear a “beep” sound and buzzer indication, then say the voice tag to make the dialing. Please refer to the mobile phone user guide for more information of voice dialing.
- ◆ **Call switching** - During a phone conversation with the **BTM-308**, press the Multi-function key for 2 seconds, you can switch the call to your mobile phone. To switch the call from mobile phone to the **BTM-308** headset, you have 2 operations for different mobile phones. For Nokia handsets, press the Multi-function key once, you can switch the call from the mobile phone to the **BTM-308** headset. For the Sony mobile phones, press the Multi-function key and hold 2 seconds to switch the call from the mobile phone to the **BTM-308** headset.
- ◆ **Reject calls** - To reject an incoming call, press the Multi-function key and hold for 2~3 seconds
- ◆ **Switch on the buzzer** – Press the **—** until you hear “Di-Di”, then release.
- ◆ **Switch off the buzzer** – Press the **—** until you hear a long “Di”, then release.
- ◆ **Bluetooth connection broken alert** –the buzzer will sound “Di-Di” in one second interval for 4 times to alert when the Bluetooth connection with your mobile phone is broken. At the same time, the LED flashes blue for every 5 seconds (LED flashes red if it is battery low). This LED flashing will continue for 3 minutes. If the mobile phone and **BTM-308** headset come into working distance within 3 minutes, they will connect again automatically.
- ◆ **Mobile phone and headset re-connection** – If the Bluetooth connection of mobile phone and headset is broken, press the Multi-function key once will re-connect them. To listen the MP3 music, press the Multi-function key one more time.

Connecting PC for chatting and listening MP3 music

For voice application with the personal computer, firstly connect the **BTM-308** headset with your PC by a Bluetooth dongle, then run the music player or VoIP software for chatting or listening music. Please refer to the user manual of the utility software for detail operation procedures.

Select songs

Press the **▶▶** for the next song and the **◀◀** for previous song.

Play/Pause

Press the Multi-function key once to pause playing a song; press again to resume playing.

Accept incoming call while playing MP3

Press the Multi-function key once to accept an incoming call while the **BTM-308** headset is playing the MP3 music. Press the Multi-function key once to end the call and automatically switch back to the MP3 mode in a few seconds.

Troubleshooting

If you are unable to connect your headset and mobile phone, please try the following:

- Ensure the headset is turned on and is properly charged.
- Ensure the headset is paired and in connection with your mobile phone.
- Ensure the mobile phone's Bluetooth feature is activated. Please refer to your mobile phone user guide for specific instruction.
- Ensure the headset is within a maximum of 10m from your mobile phone(s) and there are no obstructions, such as walls or other electronic devices in between.

If the above steps can not solve your problem, please recharge the headset and remove the battery of your mobile phone for a while to clear the data stored in the mobile phone and try to pair again.

Safety information

- Check local laws regarding use of a mobile phone and headset while driving. If you use the headset while

- driving, ensure your attention and focus remains on your responsibility of driving safely.
- Never allow children to play with the headset. Small parts may be a choking hazard.
- Observe all signs that require an electrical device or RF radio product to be switched off in designated areas. These could include hospitals, blasting areas and potentially explosive atmospheres.
- Turn off your headset prior to boarding an aircraft. Do not use your headset in an aircraft.
- Never mount or store your headset over any bag deployment area as serious injury may result when an air bag deploys.
- Do not open or mutilate the built-in battery.

Care and maintenance

Headset

- Consider turning your headset off before placing it in your pocket or bag. You may make an unintended call if you press the headset to redial.
- Do not expose the headset to liquid, moisture or humidity as it is not waterproof and unable to repair if get wet.
- Do not use abrasive cleaning solvents to clean the headset.
- Do not expose the headset to extremely high or low temperatures.
- Do not attempt to disassemble the headset as it does not contain serviceable components.
- If you do not use the headset for long periods, be sure to store it in a dry place free from extreme temperatures and dust.

Battery information

- Do not attempt to replace the headset's battery yourself as it is in-built and is not changeable.
- Your device is powered by a rechargeable battery. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles. The battery can be charged and discharged hundreds of times, but it will eventually wear out.
- Unplug the charger from the electrical plug and device when not in use.
- Overcharging may shorten its lifetime. If left unused, a fully charged battery will lose its charge overtime.
- **Use only the original battery charger and USB cable.**
- Leaving the device in hot or cold places, such as in a closed car in summer or winter conditions will reduce the capacity and lifetime of the battery. Always try to keep the battery between 15°C and 25°C. A device with charged battery performance is particularly limited in temperatures well below freezing point.
- Do not dispose of battery in fire as they may explode. Dispose of battery according to local regulations.

Product specifications

Bluetooth specification:	CSR Version 2.0
Transmission Range:	10m point-to point
Bluetooth Profile Supported:	A2DP, AVRCP, Handset and Hands free Profile
Operating Frequency:	2.4GHz
Normal Charging Time:	Within 3 hours
MP3 Play Time:	About 7 hours
Talk Time:	About 6 hours
Standby Time:	About 180 hours

*The operation time may vary due to the user's operation mode and mobile phone settings.